

**Final**  
**pH (H<sup>+</sup> Ion Mass)**  
**Total Maximum Daily Load (TMDL)**  
**for**  
**Butchers Branch of Blackford Creek Watershed**  
**(Hancock County, Kentucky)**

**Kentucky Department for Environmental Protection**

**Division of Water**

**Frankfort, Kentucky**

**January 2006**



**pH (H<sup>+</sup> Ion Mass)**

**Total Maximum Daily Load (TMDL)**

for


**Butchers Branch of Blackford Creek Watershed  
(Hancock County, Kentucky)**

**Kentucky Department for Environmental Protection**

**Division of Water**

**Frankfort, Kentucky**

This report has been approved for release:

  
David W. Morgan, Director

Division of Water

Date

1/13/06

**pH (H<sup>+</sup> Ion Mass)  
Total Maximum Daily Load (TMDL)  
for  
Butchers Branch of Blackford Creek Watershed  
(Hancock County, Kentucky)**

**Kentucky Department for Environmental Protection  
Division of Water**

**Frankfort, Kentucky**

**List of Contributors**

Dr. Lindell Ormsbee, Supervisor

Mohammad Tufail, P.E., Data Analysis and Report Preparation

The Tracy Farmer Center for the Environment  
University of Kentucky, Lexington, Kentucky 40506

The Natural Resources and Environmental Protection Cabinet does not discriminate on the basis of race, color, natural origin, sex, age, religion, or disability and provides on request, reasonable accommodations including auxiliary aids and services necessary to afford an individual with a disability an equal opportunity to participate in all services, programs, and activities.

Printed on Recycled Paper

# Table of Contents

	Page
List of Contributors.....	i
Table of Contents.....	ii
List of Figures and Tables.....	iii
TMDL Fact Sheet.....	iv
Introduction.....	1
Problem Definition.....	3
Target Identification.....	4
Source Assessment.....	5
TMDL Development.....	8
Model Development.....	8
Critical Flow and TMDL Determination.....	12
Hydrogen Ion Loading Model.....	14
Predicted Load.....	16
Load Reduction Allocation.....	17
Permitting.....	18
Implementation/Remediation Strategy.....	20
Load Reduction Strategy Using Limestone Sand.....	22
Public Participation.....	24
Literature Cited.....	25
Appendix A: Mining Permits Numbering System.....	26

## List of Figures and Tables

<b>Figures</b>	<b>Page</b>
1. Location of the Butchers Branch Watershed .....	1
2. Sampling Sites Monitored by the Kentucky Division of Water .....	6
3. Activity Coefficients of $H^+$ as a Function of Ionic Strength .....	9
4. Relation Between Flow (Discharge) and Maximum Ion Load for a pH of 6.0 .....	11
5. Relation Between Drainage Area and the Critical TMDL Flow .....	13
6. Relation Between Flow and Ion Load for Site 8 .....	14
7. Relation Between Flow and Ion Load for Site 9 .....	15
8. Relation Between Flow and Ion Load for Site 5 .....	15
9. Relation Between Flow and Ion Load for Site 6 .....	16
10. $CaCO_3$ Loading vs. Required Hydrogen Ion Reduction .....	23


<b>Tables</b>	<b>Page</b>
1. Kentucky Division of Water Sample Results, 2000-02 .....	7
2. Lowest 10-year Mean Annual Flow Rates (cfs) for Stations in Regional Analysis ....	12
3. Flow and Corresponding TMDL for Sites (Subbasins) 8, 9, 5, and 6 .....	13
4. Predicted Ion Load for Subbasins 8, 9, 5, and 6 .....	17
5. TMDL Summary and Reduction Needed for Subbasins 8, 9, 5, and 6 .....	17
6. Wasteload and Load Allocation for Subbasins 8, 9, 5, and 6 .....	20
7. Reclamation Projects Addressing AMD in Western Kentucky .....	21
8. $CaCO_3$ Loadings for Butchers Branch .....	24

# Butchers Branch of Blackford Creek

## Total Maximum Daily Load (TMDL) Fact Sheet

<b>Project Name:</b>	Butchers Branch of Blackford Creek
<b>Location:</b>	Hancock County, Kentucky
<b>Scope/Size:</b>	Butchers Branch watershed 2,138 acres (3.34 mi <sup>2</sup> ) Stream Segment: river mile 0.0 to 2.3 Note: river mile 0.0 to 0.3 received midcycle delisting approval on June 3, 2005
<b>Land Type:</b>	forest, agricultural, barren/spoil
<b>Type of Activity:</b>	acid mine drainage (AMD) caused by abandoned mines
<b>Pollutant(s):</b>	H <sup>+</sup> Ion mass, sulfuric acid
<b>TMDL Issues:</b>	nonpoint sources
<b>Water Quality Standard/Target:</b>	The pH shall not be less than six (6.0) or more than nine (9.0) and shall not fluctuate more than one and zero tenths (1.0) pH unit over a 24-hour period. This standard is found within regulation 401 KAR 5:031.
<b>Data Sources:</b>	Kentucky Pollutant Discharge Elimination System permit historical sampling data, Kentucky Division of Water (KDOW) data collection
<b>Control Measures:</b>	Kentucky nonpoint source TMDL implementation plan, Kentucky Watershed Framework
<b>Summary:</b>	Butchers Branch was determined as not supporting the designated uses of primary and secondary contact recreation (swimming and wading) and warm water aquatic habitat (aquatic life). Therefore, the creek was placed on the 303(d) List for TMDL development. The creek segment is characterized by a depressed pH, the result of AMD from abandoned mining sites. In developing the TMDL for Butchers Branch, pH readings and corresponding streamflow measurements were made at eight different locations within the watershed. This sampling supports the conclusion that Subbasin 8 (which is that portion of the watershed upstream from river mile 1.6)

is the primary contributor to the pH impairment on Butchers Branch and that remediation of Subbasin 8 (and to a lesser extent Subbasin 9) would result in the entire length of Butchers Branch meeting acceptable pH levels. All other tributaries to the main stem had acceptable pH values except one value of 5.83 at Site 9. The impairment for low pH on the main stem of Butchers Branch currently extends from the headwaters (Subbasin 8) to Site 5, which is at river mile 0.7. This TMDL though will be developed for the watershed upstream from Site 6, which is at river mile 0.3. All other main stem sites downstream from Site 6 had acceptable pH values. Therefore, there is no impairment below Site 6 (river mile 0.0 to 0.3). The EPA granted a midcycle delisting request for river mile 0.0 to 0.3 for low pH on June 3, 2005.

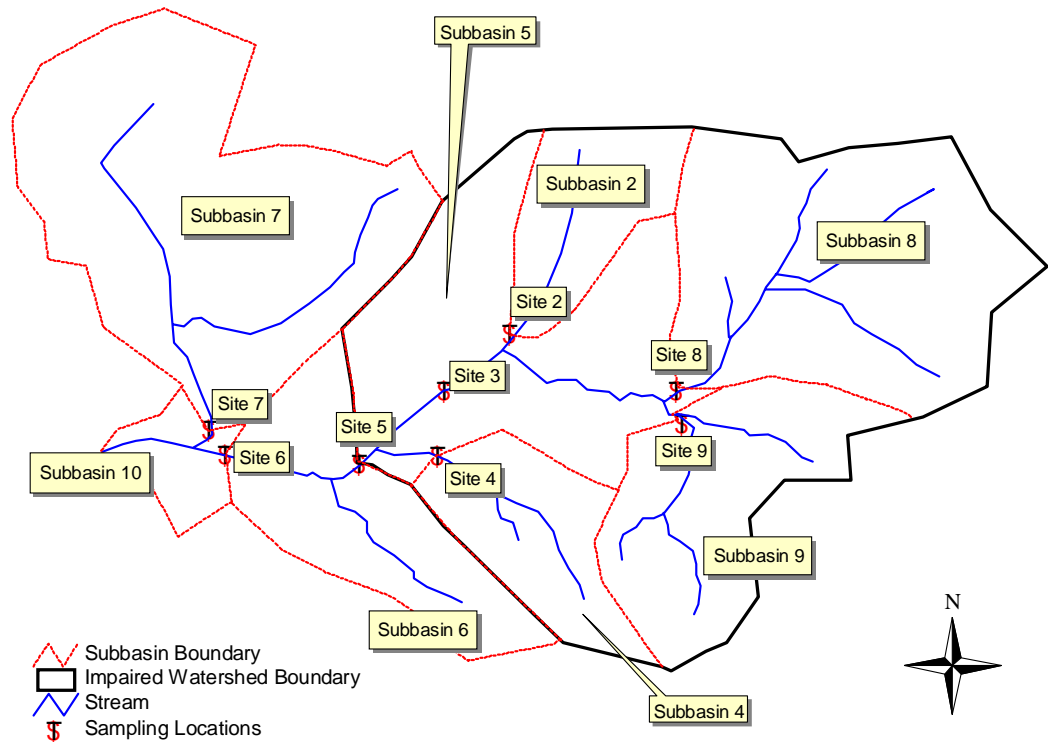

Kentucky Division of Water Sampling Locations on Butcher's Branch

**TMDL Development:**

TMDLs in grams H<sup>+</sup> ions per day were computed based on the allowable minimum pH value of 6.0 for streams to meet primary and secondary contact recreation (swimming and wading) and aquatic life uses. The TMDL was done for grams of ions (subsequently converted to lbs/day) because

the units for pH do not allow for the computation of a quantitatively useful load or reduction amount.

In recognition of the inherent difficulties associated with imposition of a “no-exceedance” pH criteria on potentially intermittent streams, the KDOW has decided to use the lowest one year average discharge of the most recent 10-year flow record as the flow basis for setting the appropriate TMDL and associated loading reduction. Previous pH TMDLs have used a 3-year recurrence interval of the average flow as the critical flow. However, this flow resulted in a target discharge that frequently was significantly greater than any of the observed flows for the sites as collected over several years. Thus use of a 3-year flow would require an extrapolation of the observed ion vs. flow model, well beyond the upper limit of the observed data. The selection of the 10-year frequency was based on a consideration of water quality standards (WQSs) (i.e. 7Q10). However, since many of these streams have a 7Q10 of zero, a greater duration was needed. The consensus of the KDOW was to use the 1-year duration. The use of an average annual flow as the basis for determining the TMDL provides a more appropriate mechanism for determining: (1) the total annual load; (2) the total annual reduction that would be derived from an annual summation of the daily TMDLs; and (3) the associated daily load reductions for the critical year using historical daily flows.

**TMDL for Butchers  
Branch:**

In developing a TMDL for Butchers Branch, there are two possible strategies. Either a cumulative TMDL may be obtained for the downstream extent of the impaired portion of the watershed, or separate TMDLs (and associated load reductions) may be developed for each individual subbasin. As a result of the availability of sampling data at multiple sampling points, individual TMDLs were developed for Subbasins 8, 9, 5, and 6. Subbasins 8 and 9 are headwater subbasins. Subbasin 5 includes Subbasins 2 and 4 in addition to Subbasins 8 and 9. Subbasin 6 receives flow from Subbasins 2, 4, 5, 8, and 9. The greatest impairment is the result of Subbasin 8. It is hypothesized that the remediation of Subbasin 8 (and to a lesser extent Subbasin 9) will lead to the restoration of the complete watershed. The focus should be on Subbasin 8. The low pH condition extends to Site 5, which is the downstream extent of Subbasin 5, but this TMDL will be developed for the



watershed upstream of Site 6, which is the downstream extent of Subbasin 6. The TMDLs and associated load reductions for Subbasins 8, 9, 5, and 6 are shown below.

TMDLs and Associated Load Reductions

Subbasin	Upstream contributing area (mi <sup>2</sup> )	Incremental critical flow (cfs)	Incremental TMDL for a pH of 6.0 (lbs/day)	Predicted incremental load (lbs/day)	Load reduction needed (lbs/day)
8	0.70	0.435	0.00235	0.2084	0.2061
9	0.38	0.236	0.00127	0.0042	0.0029
5	2.01	0.323	0.00174	0.0000	0.0000
6	2.36	0.217	0.00118	0.0000	0.0000

**Permitting Other Than**

**in Subbasins 8, 9, 5 and 6:** Permitting for locations in the Butchers Branch watershed other than in Subbasins 8, 9, 5, and 6 would require no special considerations related to 303(d). Subbasin 5 includes Subbasins 2 and 4.

**New Permits:**

New permits (except for new remaining permits) for discharges to streams in the Butchers Branch watershed could be allowed anywhere in Subbasins 8, 9, 6, and 5 (which includes Subbasins 2 and 4), contingent upon end-of-pipe pH permit limits in the range of 6.35 to 9.0 standard units. WQS state that the pH value should not be less than 6.0 nor greater than 9.0 for meeting the designated uses of aquatic life and swimming. This range of 6.0 to 9.0 for pH is generally assigned as end-of-pipe effluent limits. However, because a stream impairment exists (low pH), new discharges should not cause or contribute to an existing impairment. Application of agricultural limestone on mine sites results in highly buffered water leaving the site. A buffered solution with nearly equal bicarbonate and carbonic acid components will have a pH of 6.35 (Carew, personal communication, 2004). Discharge of this buffered solution will use up free hydrogen ions in the receiving stream, thus it should not cause or contribute to an existing low-pH impairment. New permits having an effluent limit pH of 6.35 to 9.0 will not be assigned a hydrogen ion load as part of a Waste Load Allocation (WLA).

**Remining Permits:**

Remining permits may be approved on a case-by-case basis where streams are impaired because of low pH from abandoned mines. Permit approval is contingent on reclamation of the site after mining activities are completed. Existing water quality conditions must be maintained or improved during the course of remining. The permittee is required to monitor in-stream conditions during remining to make sure that current water quality conditions are maintained or improved. Reclamation of the site is the ultimate goal, but WQSs (pH of 6.0 to 9.0 standard units) may not necessarily be met in the interim if the Commonwealth issues a variance to the discharger. In instances where the Commonwealth issues a variance for a remining activity consistent with this regulation, hydrogen ion loads from this remining activity are allowed to exceed the WLA. The variance allows an exception to the applicable WQS as well as the TMDL. Remining therefore constitutes a means whereby a previously disturbed and unreclaimed area can be reclaimed. The authority for remining is defined in Section 301(p) of the Federal Clean Water Act; Chapter 33, Section 1331(p) of the U.S. Code – Annotated (the Rahall Amendment to the Federal Clean Water Act); and the Kentucky Administrative Regulations (401 KAR 5:029 and 5:040).

The remediation of the remining site will result in a reduction of the nonpoint source ion load of the subbasin where the remining is done. When remining is completed, the remediation should result in a reduction in the load allocation. Follow-up, in-stream monitoring will need to be done at the subbasin outfall to determine the effect of reclamation activities following remining on the overall ion load coming from the subbasin.

**General KPDES Permit  
for Coal Mine Discharges:**

This permit covers all new and existing discharges associated with coal mine runoff. This permit does not authorize discharges that (1) are subject to an existing individual KPDES permit or application, (2) are subject to a promulgated storm water effluent guidelines or standard, (3) the Director has determined to be or may reasonably be expected to be contributed to a violation of a water of a WQS or to the impairment of a 303(d) listed water, or (4) are into a surface water that has been classified as an Exceptional or Outstanding or National Resource Water. A signed copy of a Notice of Intent (NOI) form must be submitted to the Kentucky Division of Water (KPDES

Branch) when the initial application is filed with the Division of Mine Permits. However, coverage under this general permit may be denied and submittal of an application for an individual KPDES permit may be required based on a review of the NOI and/or other information.

**Antidegradation Policy:** Kentucky’s Antidegradation Policy was approved by EPA on April 12, 2005. For impaired waters, general permit coverage will not be allowed for one or more of the pollutants commonly associated with coal mining (i.e., sedimentation, solids, pH, metals, alkalinity of acidity). The individual permit process remains the same except new conditions may apply if a Total Maximum Daily Load (TMDL) has been developed and approved.

**Distribution of Load:** Because there were no point source discharges active during the 2000-2002 monitoring period, the existing hydrogen ion load for the watershed was defined entirely as a nonpoint source load. Because new permits (pH 6.35 to 9.0) should not cause or contribute to the existing impairment and remining permits would be exempt from the TMDL requirements, no load has been provided for the WLA category.

Wasteload and Load Allocation for Each Subbasin in the Butchers Branch Watershed

Subbasin	Incremental Critical Flow Rate (cfs)	TMDL for pH = 6.0 (lbs/day)	Wasteload Allocation* (lbs/day)	Load Allocation (lbs/day)
Subbasin 8	0.435	0.00235	0.0	0.00235
Subbasin 9	0.236	0.00127	0.0	0.00127
Subbasin 5	0.323	0.00174	0.0	0.00174
Subbasin 6	0.217	0.00118	0.0	0.00118

\*pH limits for new discharges must be between 6.35 and 9.0

**Implementation/ Remediation Strategy:** Remediation of pH-impaired streams as a result of current mining operations is the responsibility of the mine operator. The Kentucky Division of Field Services of the Kentucky Department of Surface Mining Reclamation and Enforcement (DSMRE) is responsible for enforcing the Surface Mining Control and Reclamation Act of 1977 (SMCRA). The Kentucky Division of Abandoned Mine Lands (DAML), also a part of DSMRE, is charged with

performing reclamation to address the impacts from pre-law and bond forfeiture mine sites in accordance with priorities established in SMCRA. SMCRA sets environmental problems as third in priority in the list of abandoned mine land (AML) problem types.

Prior to initiating reclamation activities to improve water quality, a watershed plan should be developed in order to more precisely identify past mine site operations in the watershed. For example, the watershed plan should include a detailed overview of past mine operations, including the location of the mine, the permit number, the type of mining and the status of the mine (e.g. active, bond forfeited, bond released, illegal “wildcat” mining, etc.). Refining historic landuses in the watershed, with a particular focus on mine site operations, will assist with identifying the most appropriate funding source(s) as well as the best management practices needed for remediating the pH impacts.

In addition to historic mine operation inventory, the watershed plan should identify (1) point and nonpoint source controls needed to attain and maintain WQSs, (2) who will be responsible for implementation of controls and measures, (3) an estimate of the load reductions to be achieved, (4) threats to other waters, (5) an estimate of the implementation costs and identify financing sources, (6) a monitoring plan and adaptive implementation process and (7) a public participation process. The watershed plan should consider non-traditional opportunities and strive for the most cost-effective long-term solutions for restoring the water quality of Butchers Branch.

Practical application of pH TMDLs, especially for AMLs, will normally involve a phased implementation approach with associated monitoring in order to insure that the implemented measures are having the desired effect. That has been the strategy pursued thus far with regard to watersheds in Kentucky. Typical remediation strategies have involved channel restoration, re-vegetation, and the use of agricultural limestone. On sites where applicable, and funding allows, passive treatment systems have been used to treat AMD including open limestone channels, vertical flow systems, limestone dosing, and constructed wetlands.

There are currently no remediation activities underway in the Butchers Branch watershed. However, reclamation activities have occurred at other locations within the state where AMD affects water quality. Examples of reclamation projects addressing AMD in western KY are summarized below.

Reclamation Projects Addressing AMD in Western KY

<b>Watershed</b>	<b>Project Name</b>	<b>Cost</b>
Brier Creek	Brier Creek	\$522,041
	Buttermilk Road	\$403,320
Crab Orchard Creek	Crab Orchard Mine	\$1,038,203
	Zugg Borehole	\$11,974
Pleasant Run	Pleasant Run	\$2,162,085
	Pleasant Run II	\$421,384
Pond Creek	Pond Creek I	\$50,118
	Pond Creek II	\$3,801,740
	Pond Creek III	\$4,011,514
Flat Creek	East Diamond Mine	\$535,000
	Flat Creek	\$720,572
Render Creek	McHenry Coop. Agreement	\$130,165
	McHenry II	\$1,075,340
	Vulcan Mine	\$585,359

For 2000, the total federal DAML budget allocation was approximately \$17 million. However, the bulk of these funds were used to support Priority 1 (extreme danger of adverse effects to public health, safety, welfare, and property) and Priority 2 (adverse effects to public health, safety, and welfare) projects. Of the total annual federal budget allocation, AML receives only approximately \$700,000 in Appalachian Clean Streams Initiative funds, which are targeted for Priority 3 environmental problems. Based on the cost of current remediation efforts, it would appear that a significant increase in federal funding to the DAML projects, particularly Priority 3 projects, would be required in order for the AML program to play a significant part in meeting the TMDL implementation requirement associated with pH-impaired streams in the state of Kentucky.

## Introduction

Section 303(d) of the Clean Water Act and the Environmental Protection Agency's Water Quality Planning and Management Regulations (40 CFR Part 130) require states to develop total maximum daily loads (TMDLs) for water bodies that are not meeting designated uses under technology-based controls for pollution. The TMDL process establishes the allowable loadings of pollutants or other quantifiable parameters for a water body based on the relationship between pollution sources and in-stream water quality conditions. This method exists so that states can establish water-quality based controls to reduce pollution from both point and nonpoint sources and restore and maintain the quality of their water resources (EPA, 1991).

### *Location*

The Butchers Branch watershed is contained entirely within Hancock County, in western Kentucky (Figure 1).

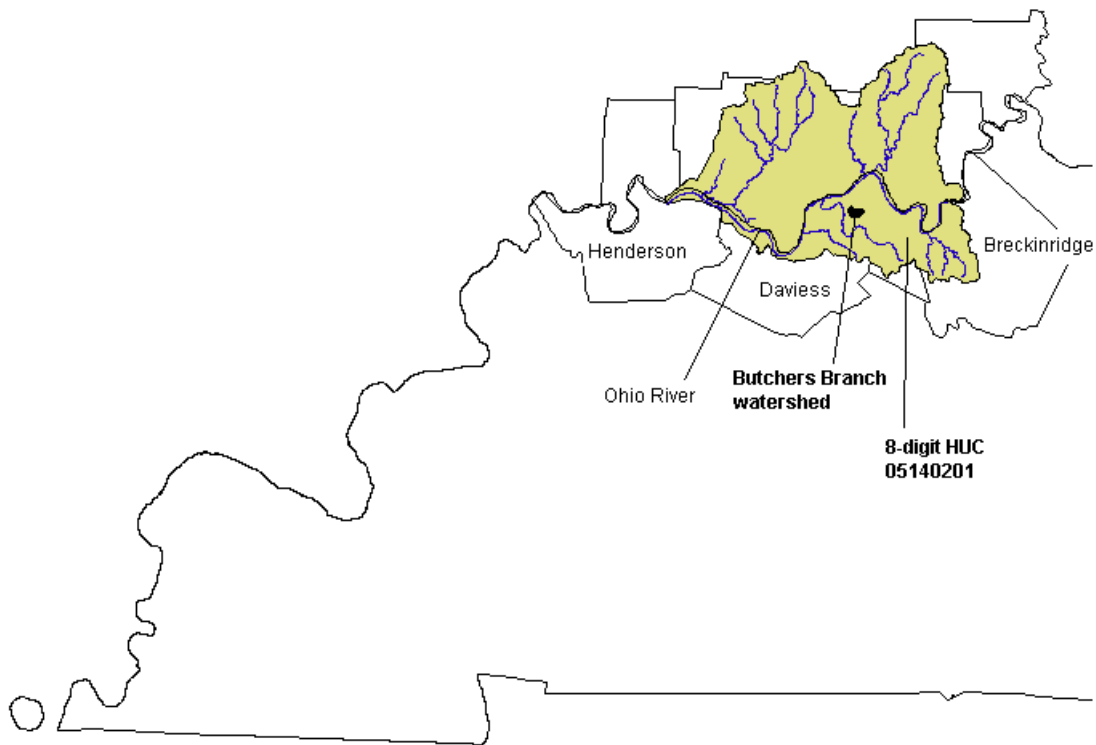


Figure 1. Location of the Butchers Branch Watershed

### *Hydrologic Information*

Butchers Branch, a third order stream, originates in southern Hancock County and flows northeast to discharge into the Blackford Creek 20 miles upstream from its confluence with the Ohio River. Butchers Branch's mainstem is approximately 2.5 miles long and drains an area of 2,138 acres (3.34 mi<sup>2</sup>). The average gradient is 12.5 feet per mile. Elevations for Butchers Branch range from 640 ft above mean sea level (msl) in the headwaters to 380 ft above msl at the most downstream point.

### *Geologic Information*

The Butchers Branch watershed is in the Western Coal field physiographic region. The surface bedrock is of Pennsylvanian age. Formations of the Pennsylvanian age are mostly sandstone, siltstone, and shale (US Department of Agriculture, 1974). The relief of the Butchers Branch watershed ranges from nearly level to steep. Gently sloping to steep soils are found in the uplands and nearly level soils are found on the floodplain.

### *Landuse Information*

Petroleum, coal, sand, gravel, trees, and water are among the natural resources of Hancock County. The Butchers Branch watershed contains two main landuses: resource extraction (mining and disturbed land area) and agriculture.

### *Soils Information*

Butchers Branch watershed is dominated by nearly level loamy and clayey soils near to the mouth and level to steep loamy soils in the headwaters. The floodplains at the mouth of Butchers Branch are comprised of poorly drained soils formed in alluvium. The remainder of the watershed is dominated by Zanesville series soil, consisting of weathered shale and acid sandstone.

### *Mining History*

According to the landowner of most of the upper watershed, mining occurred as early as the 1930's, but no mining has occurred since the early 1980's. Mining permits in Kentucky are classified on the basis of whether the original permit was issued prior to May 3, 1978 (pre-law permit), after January 18, 1983 (post-Kentucky primacy) or between these dates (interim period). An explanation of the permit numbering system is provided in Appendix A.

### *Monitoring History*

The waters of Butchers Branch were monitored as early as 1978 by the Division of Water (KDOW) as reported in *The Effects of Coal Mining Activities on the Water Quality of Streams in the Western and Eastern Coalfields of Kentucky*, published in 1981 by the Kentucky KDOW as part of an agreement with the Kentucky Division of Abandoned Mine Lands (DAML).

Based on this older data, Butchers Branch was placed on the 1996, 1998 and 2002 303(d) Lists as impaired for the aquatic life and swimming uses because of low pH that required developing a TMDL. Therefore, pH data and corresponding flow (streamflow) data were collected from late 2000 to early 2002.


### Problem Definition

The 1996, 1998, and 2002 303(d) Lists of waters for Kentucky (KDOW; 1996, 1998, and 2003) indicates 2.3 miles of Butchers Branch, from the upstream mile point 2.3 to downstream mile point 0.0 in Hancock County, does not meet the designated uses of primary and secondary contact recreation (swimming and wading) and aquatic life. The EPA granted a midcycle delisting request for river mile 0.0 to 0.3 for low pH on June 3, 2005. The Butchers Branch watershed provides a classic example of impairment caused by AMD. Bituminous coal mine drainage, like that found in the Butchers Branch watershed, generally contains very concentrated sulfuric acid and may contain high concentrations of metals, especially iron, manganese, and aluminum.


AMD can: (1) ruin domestic and industrial water supplies; (2) decimate aquatic life; and (3) cause waters to be unsuitable for swimming and wading (primary and secondary contact recreation). In addition to these problems, a depressed pH interferes with the natural stream self-purification processes. At low pH levels, the iron associated with AMD is soluble. However, in downstream reaches where the pH begins to improve, most of the ferric sulfate  $[\text{Fe}_2(\text{SO}_4)_3]$  is hydrolyzed to essentially insoluble iron hydroxide  $[\text{Fe}(\text{OH})_3]$ . The stream bottom can become covered with a sterile orange or yellow-brown iron hydroxide deposit that impacts benthic algae, invertebrates, and fish.

The sulfuric acid in AMD is formed by the oxidation of sulfur contained in the coal and the rock or clay found above and below the coal seams. Most of the sulfur in the unexposed coal is found in a pyritic form as iron pyrite and marcasite (both having the chemical composition  $\text{FeS}_2$ ).


In the process of mining, the iron sulfide ( $\text{FeS}_2$ ) is uncovered and exposed to the oxidizing action of oxygen in the air ( $\text{O}_2$ ), water, and sulfur-oxidizing bacteria. The end products of the reaction are as follows:



The subsequent oxidation of ferrous iron and acid solution to ferric iron is generally slow. The reaction may be represented as:




As the ferric acid solution is further diluted and neutralized in a receiving stream and the pH rises, the ferric iron  $[\text{Fe}^{3+}$  or  $\text{Fe}_2(\text{SO}_4)_3]$  hydrolyses and ferric hydroxide  $[\text{Fe}(\text{OH})_3]$  may precipitate according to the reaction:





The brownish yellow ferric hydroxide (Fe(OH)<sub>3</sub>) may remain suspended in the stream even when it is no longer acidic. Although the brownish, yellow staining of the stream-banks and water does not cause the low pH, it does indicate that there has been production of sulfuric acid. The overall stoichiometric relationship is shown in equation (4):



This reaction (eqn. 4) indicates that a net of 4 moles of H<sup>+</sup> are liberated for each mole of pyrite (FeS<sub>2</sub>) oxidized, making this one of the most acidic weathering reactions known.

### **Target Identification**

The endpoint or goal of a pH TMDL is to achieve a pH concentration and associated hydrogen ion load in lbs/day that supports aquatic life and recreation uses. The pH criterion to protect these uses is in the range of 6.0 to 9.0 (Title 401, Kentucky Administrative Regulations, Chapter 5:031). For a watershed impacted by AMD, the focus will be on meeting the lower criterion. Water quality criteria have not been specified in terms of a particular frequency of occurrence. As pointed out in the recent NRC TMDL report (2001), “All chemical criteria should be defined in terms of magnitude, frequency, and duration. Each of these three components is pollutant-specific and may vary with season. The frequency component should be expressed in terms of a number of allowed flow excursions in a specified period (return period) and not in terms of the low flow or an absolute “never to be exceeded” limit. Water quality criteria may occasionally be exceeded because of the variability of natural systems and discharges from point and nonpoint sources.” Small, intermittent streams are especially vulnerable to this variability.

The Technical Support Document for Water Quality-Based Toxic Control (EPA, 1991) states that daily receiving water concentrations (loads) can be ranked from the lowest to the highest without regard to time sequence. In the absence of continuous monitoring, such values can be obtained through continuous simulation or monte-carlo analysis. A probability plot can be constructed from these ranked values, and the frequency of occurrence of any 1-day concentration of interest can be determined. Where the frequency (or probability) of the resulting concentration is greater than the maximum exceedance frequency of the water quality target (e.g. once in 10 years), associated load reductions will be required until the resulting concentration is above the minimum target value (e.g. pH = 6.0). Where the load and the associated target value can be directly related through a flow rate (also referred to as discharge or streamflow), the frequency (or probability) of the associated flow rate (e.g. 365Q10) can be directly related to the frequency (or probability) of the target pH.

In recognition of the inherent difficulties associated with imposition of a “no-exceedance” pH criteria on potentially intermittent streams, the KDOW has decided to use the lowest one year average daily discharge of the most recent 10-year flow record as

the flow basis for setting the appropriate TMDL and associated load reduction. Previous pH TMDLs have used a 3-year recurrence interval of the average flow as the critical flow. However, this flow resulted in a target discharge that frequently was significantly greater than any of the observed flows for the sites as collected over several years. Thus use of a 3-year flow would require an extrapolation of the observed ion vs. flow model, well beyond the upper limit of the observed data. The selection of the 10-year frequency was based on a consideration of water quality standards (WQSS) (i.e. 7Q10). However, since many of these streams have a 7Q10 of zero, a greater duration was needed. The consensus of the KDOW was to use the 1-year duration. Use of an average daily flow over a one year period as the basis for determining the TMDL provides an appropriate mechanism for determining: (1) the total annual load; (2) the total annual reduction that would be derived from an annual summation of both the daily TMDLs; and (3) the associated daily load reductions for the critical year using the actual historical daily flows. The equivalent total annual load can be determined by simply multiplying the TMDL (derived by using the average daily flow) by 365 days. Likewise, the equivalent total annual load reduction can be obtained by multiplying the average daily load reduction (derived by using the average daily flow over a one year period) by 365 days. Although the 10-year lowest average annual flow (which roughly corresponds to the 365Q10) is typically only exceeded by approximately 20% of the days in the critical year, it still provides for explicit load reductions for approximately 80% of the total annual flow. For actual daily flows less than average flow, incremental load reductions may be accomplished by explicit imposition of a pH standard of 6 units.

## **Source Assessment**

### *Point Source Loads*

During the 2000-2002 sampling period, there were no active permitted point source loads contributing to the existing pH impairment in the watershed.

### *Nonpoint Source Loads*

In order to provide a more recent characterization of the pH levels in the watershed, KDOW personnel collected additional pH and streamflow data at a number of sites in the watershed (Figure 2). These data are shown in Table 1. Low pH was observed on the main stem of Butchers Branch at Sites 8, 3, and 5 (which are in downstream order) and one low pH reading (5.83) was observed on a headwater tributary (Site 9). Site 5 is at RM 0.7 and the pH values that were recorded downstream from this location were all greater than 6.0. The TMDL was developed by the Tracy Farmer Center for the Environment with funding through an EPA Water Quality Cooperative Grant, which required some match on the part of the KDOW. A separate TMDL will be developed for Subbasins 8, 9, 6, and 5 based on the available information showing that the impairment extends to Site 5. The EPA granted a midcycle delisting request for river mile 0.0 to 0.3 for low pH on June 3, 2005.

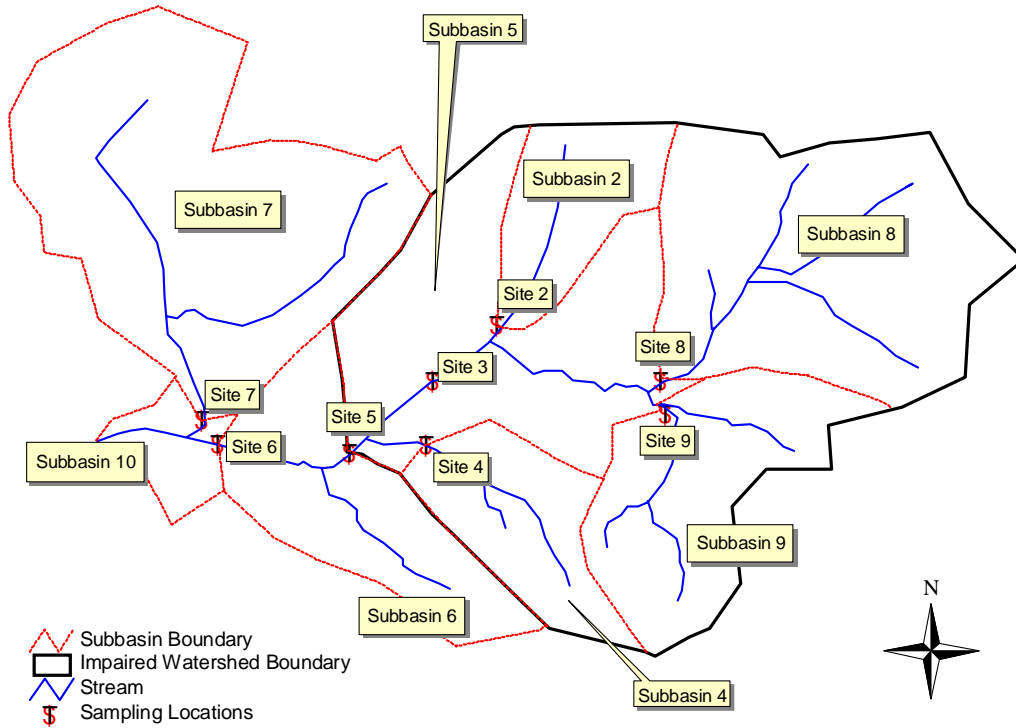


Figure 2. Sampling Sites Monitored by the Kentucky Division of Water

Table 1. Kentucky Division of Water Sample Results, 2000-02

Date	Site 2 (near mouth of UT that enters Butchers Branch at RM 1.1) 37° 53' 17" 86° 52' 35"		Site 3 (RM 1.0) 37° 53' 08" 86° 52' 47"		Site 4 (at RM 0.1 of UT that enters Butchers Branch at RM 0.7) 37° 53' 00" 86° 52' 48"		Site 5 (at RM 0.7) 37° 52' 58" 86° 53' 02"		Site 6 (at RM 0.3) 37° 52' 59" 86° 53' 24"		Site 7 (near mouth of UT that enters Butchers Branch at RM 0.25) 37° 53' 02" 86° 53' 28"		Site 8 (at RM 1.6) 37° 53' 08" 86° 52' 06"		Site 9 (near mouth of UT that enters Butchers Branch at RM 1.55) 37° 53' 06" 86° 52' 09"	
	Flow rate (cfs)	pH	Flow rate (cfs)	pH	Flow rate (cfs)	pH	Flow rate (cfs)	pH	Flow rate (cfs)	pH	Flow rate (cfs)	pH	Flow rate (cfs)	pH	Flow rate (cfs)	pH
10/25/2000	0.00		0.01	4.20	0.00				0.01	6.99	0.00		0.01	3.60	0.00	6.20
11/7/2000	0.00			4.15	0.00		0.07	4.98	0.07	6.70	0.00	8.80	0.07	4.08	0.00	6.18
11/9/2000	0.00		0.70	5.70	0.02	7.15	0.70	6.20	0.70	6.50	0.32	6.92	0.70	4.07	0.02	6.40
3/27/2000	0.07	6.31	0.44	5.20	0.04	8.40	0.51	5.90	0.51	6.39	0.12	7.42	0.26	4.25	0.14	5.83
4/20/2001	0.04	7.29	0.35	4.87	0.01	7.67	3.60	4.99	3.70	6.13	0.08	7.74	0.27	4.25	0.06	7.33
6/28/2001	Dry		Stagnant		Dry		Stagnant		<0.01		<0.01		0.01	6.09	<0.01	
8/14/2001	Dry		0.01	5.42	Dry		0.01	5.89	Stagnant	7.52	Dry		Stagnant	3.52	Dry	
8/22/2001	Dry		Stagnant		Dry		Stagnant		Stagnant		Dry		Dry		Dry	
1/8/2002	0.01	7.40		6.10	0.01	7.52	0.23	6.13	0.25	6.20	0.02	7.43	0.07	5.20	0.02	6.90

## TMDL Development

### *Theory*

The TMDL is a term used to describe the maximum amount of a pollutant a stream can assimilate without violating WQSs, and it includes a MOS. The units of a load measurement are mass of pollutant per unit time (i.e. mg/hr, lbs/day). In the case of pH there is no direct associated mass unit (pH is measured in Standard Units).

TMDLs are comprised of the sum of individual wasteload allocations (WLAs) for point sources and load allocations (LAs) for both nonpoint sources and natural background levels for a given watershed. The sum of these components may not result in exceedance of WQSs for that watershed. In addition, the TMDL must include a MOS, which is either implicit or explicit, that accounts for the uncertainty in the relation between pollutant loads and the quality of the receiving water body. Conceptually, this definition is denoted by the equation:

$$\text{TMDL} = \text{Sum (WLAs)} + \text{Sum (LAs)} + \text{MOS} \quad (9)$$

### *Margin of Safety*

The MOS is part of the TMDL development process (Section 303(d)(1)(C) of the Clean Water Act). There are two basic methods for incorporating the MOS (EPA, 1991):

- 1) Implicitly incorporate the MOS using conservative model assumptions to develop allocations, or
- 2) Explicitly specify a portion of the total TMDL as the MOS using the remainder for allocations.

## Model Development

The magnitude of the associated hydrogen ion load in a water column (in terms of activity) can be determined by measuring the pH of the water. The relationship between hydrogen load and pH can be expressed as follows:

$$\{\text{H}_3\text{O}^+\} = 10^{-\text{pH}} \quad \text{or more commonly} \quad \{\text{H}^+\} = 10^{-\text{pH}} \quad (5)$$

Where, pH is the negative log of the  $\text{H}^+$  ion activity in mol/L. To convert between the measured activity  $\{\text{H}^+\}$  and the actual molar concentration  $[\text{H}^+]$ , the activity is divided by an activity coefficient,  $\gamma$ .

$$[\text{H}^+] = \{\text{H}^+\}/\gamma \quad (6)$$

The activity coefficient,  $\gamma$ , is dependent on the ionic strength  $\mu$  of the source water under consideration. The ionic strength of a given source water can be approximated by estimating the TDS (total dissolved solids in mg/liter or ppm) and applying the following relationship (Snoeyink and Jenkins, 1980):

$$\mu = (2.5 * 10^{-5}) * \text{TDS} \quad (7)$$

Alternatively, the ionic strength of a given source of water may be related to the measured specific conductance (SC) through the following relationship (Snoeyink and Jenkins, 1980):

$$\mu = (1.6 * 10^{-5}) * \text{SC} \quad (8)$$

Ionic strength can be converted to an associated activity coefficient using the functional relationship shown in Figure 3 (Snoeyink and Jenkins, 1980).

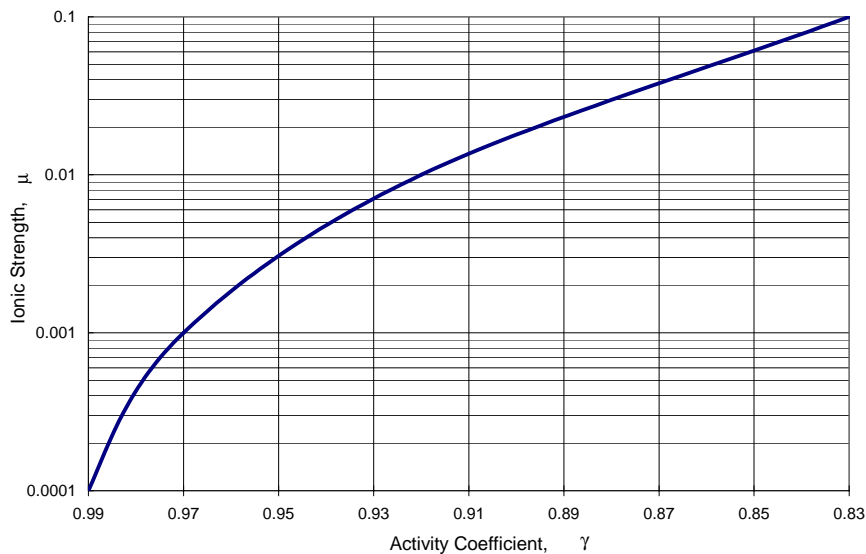


Figure 3. Activity Coefficients of H<sup>+</sup> as a Function of Ionic Strength

In the absence of actual measured values of TDS or specific conductivity, an estimate of the upper limit of the ionic strength may be obtained from an evaluation of historic values of TDS or specific conductivity collected in the area. For example, an evaluation of over 1600 measurements of specific conductivity obtained from streams in the western Kentucky coal fields (Grubb and Ryder, 1972; KDOW, 1981; and US Geological Survey [USGS], 1983) revealed a range of values from 45 to 5920  $\mu$  ohms/cm. Use of an upper limit of 6000  $\mu$  ohms/cm yields an ionic strength of 0.096 or approximately 0.10. Use of a value of ionic strength of 0.10 yields an activity coefficient of approximately 0.83.

For the Butchers Branch watershed, specific conductivity values were observed to vary from 209 to 1900  $\mu$  ohms/cm, which yields ionic strength values from 0.003344 to 0.0304 respectively. Application of Figure 3 for the observed ionic strengths in Butchers Branch Creek yields activity coefficients of 0.95 to 0.88.

The atomic weight of hydrogen is one gram per mole. Thus, the concentration of hydrogen ions in mol/L is also the concentration in g/L. Multiplying the concentration of hydrogen ions by the average flow rate for a given day results in a hydrogen ion load for that day in g/day. As a result, for any given flow rate, there is a maximum ion load that the stream can assimilate before a minimum pH value of 6.0 is violated. Thus for any given day a TMDL may be calculated for that day using the average daily flow and a minimum pH standard of 6.

Because pH and equivalent hydrogen ion load can be related as a function of discharge and ionic strength, a functional relationship can be developed between discharge and the associated ion loading for a given pH value. By specifying a minimum pH value (e.g. 6) and an associated minimum activity correction factor (e.g. 0.88), an envelope of maximum hydrogen ion loads that could still yield a pH of 6 may be obtained as a function of discharge (see the upper TMDL<sub>x</sub> curve in Figure 4). In using the proposed methodology, the MOS may be incorporated explicitly through the properties of water chemistry that determine the relationship between pH and hydrogen ion concentration. In an electrically neutral solution, the activity coefficient ( $\gamma$  in equation 6) is assumed to be equal to 1.0, meaning that there is no quantitative difference between activity and molar concentration. In the case of AMD there obviously exists the possibility of additional ions in the water column that may affect the relationship between the measured activity and the associated ion load. To develop a TMDL for an impaired stream, the most conservative approach would be to assume an activity coefficient of 1.0, which would yield the lowest value for the TMDL for a given range of activity coefficients (see lower TMDL<sub>1</sub> curve in Figure 4). The difference between the maximum TMDL<sub>x</sub> (based on the observed activity coefficient) and the minimum TMDL<sub>1</sub> (based on an activity coefficient of 1.0) would provide an explicit margin of safety (MOS) in setting the TMDL for the stream as well as for calculating the associated load reduction. In developing a TMDL for the Butchers Branch watershed, the TMDL for each of the Subbasins 8, 9, 6, and 5 will be established assuming an activity coefficient of 1.0, while the observed load will be determined using an activity coefficient of 0.88, providing for an upper limit for an explicit MOS of approximately 12 percent. Even though this MOS can be deemed as an explicit MOS, for this TMDL it will be expressed as an implicit MOS because a conservative assumption has been used to determine the value of the TMDL.

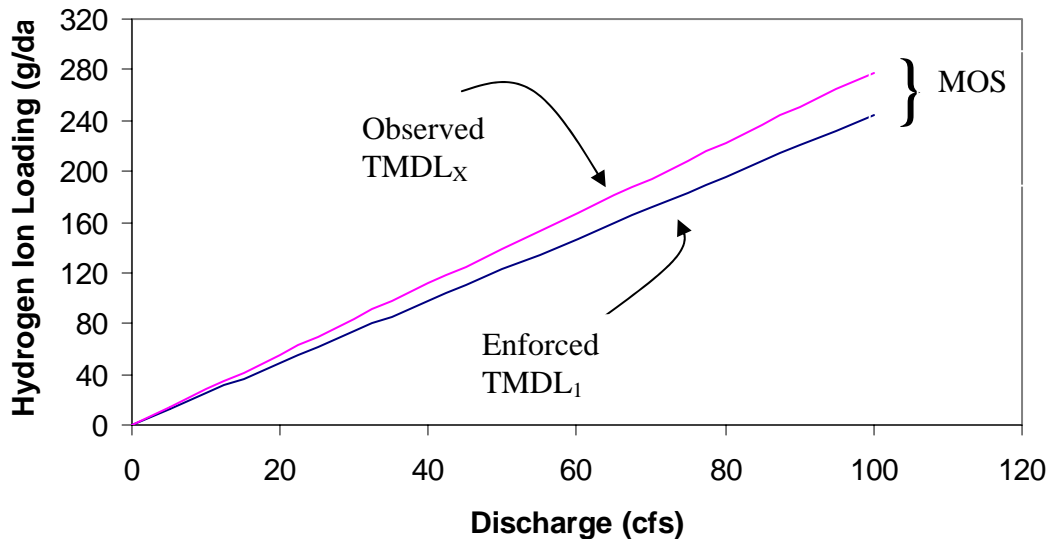


Figure 4. Relation Between Flow (Discharge) and Maximum Ion Load for a pH of 6.0

#### *Hydrogen Loading Example Calculation*

In order to demonstrate the hydrogen loading conversion procedure, use the following monitoring data:

- Critical discharge (Q) = 0.435 cfs (Subbasin 8)
- Measured pH = 6.0

The pH can be converted to a mole/liter measurement (i.e. moles [H<sup>+</sup>]/liter) by applying the following relationship:

$$\text{pH} = -\log \{ \text{H}^+ \}$$

The resulting moles of hydrogen is the anti-log of -6.0, which is 0.000001 moles/liter. The units need to be converted into grams/cubic ft. This is accomplished by applying the following conversion factors:

- There is one gram per mole of hydrogen.
- 1 liter = 0.035314667 cubic feet

$$(0.000001 \text{ moles/liter}) * (1 \text{ gram/mole}) * (1 \text{ liter} / 0.035314667 \text{ ft}^3) = 0.0000283168 \text{ g/ft}^3$$

The goal is to achieve a loading rate in terms of g/day, or lbs/day. If the amount of hydrogen in grams/cubic foot is multiplied by the given flow rate in cubic feet/second and a conversion factor of 86,400 s/day, then the load is computed as:



$$(0.0000283168 \text{ g/ft}^3) * (0.435 \text{ ft}^3/\text{s}) * (86400\text{s}/1\text{day}) = 1.064 \text{ g/day, or } 0.00235 \text{ lbs/day}$$

Assuming an activity correction factor of 0.88, the maximum load is 1.2091 g/day, or 0.00267 lbs/day:

$$1.064 \text{ g/day} / 0.88 = 1.2091 \text{ g/day, or } 0.00267 \text{ lbs/day}$$

Therefore, by using an activity coefficient of 1.0 instead of 0.88 to develop the TMDL values, a MOS of approximately 12 percent is realized.

### **Critical Flow and TMDL Determination**

Because maximum hydrogen ion loading values can be directly related to flow using Figures 6-9, the associated allowable ion loading can be directly related to the flow. In order to find the lowest 10-year average annual discharge for the Butchers Branch watershed, a regional hydrologic frequency analysis was used. Regional analysis can be used to develop an inductive model using data collected at streamflow gaging stations that are located in the same hydrologic region as the watershed of interest. For this study, the following USGS gaging stations were selected: 03320500, 03384000, 03383000, and 03321350. The data from these gages were used to estimate the lowest average annual flows of the most recent 10 years (see Table 2). These flow rates were then regressed with watershed area to produce Figure 5. Using this figure, the lowest 10-year mean annual discharge for a given watershed area can be readily determined.

Table 2. Lowest 10-year Mean Annual Flow Rates (cfs) for Stations in Regional Analysis

	USGS Gaging Station Numbers			
Station	3384000	3321350	3320500	3383000
Area (mi <sup>2</sup> )	2.10	58.20	194.00	255.00
Flow (cfs)	0.69	49.10	99.70	166.00

### Regional Flow Analysis

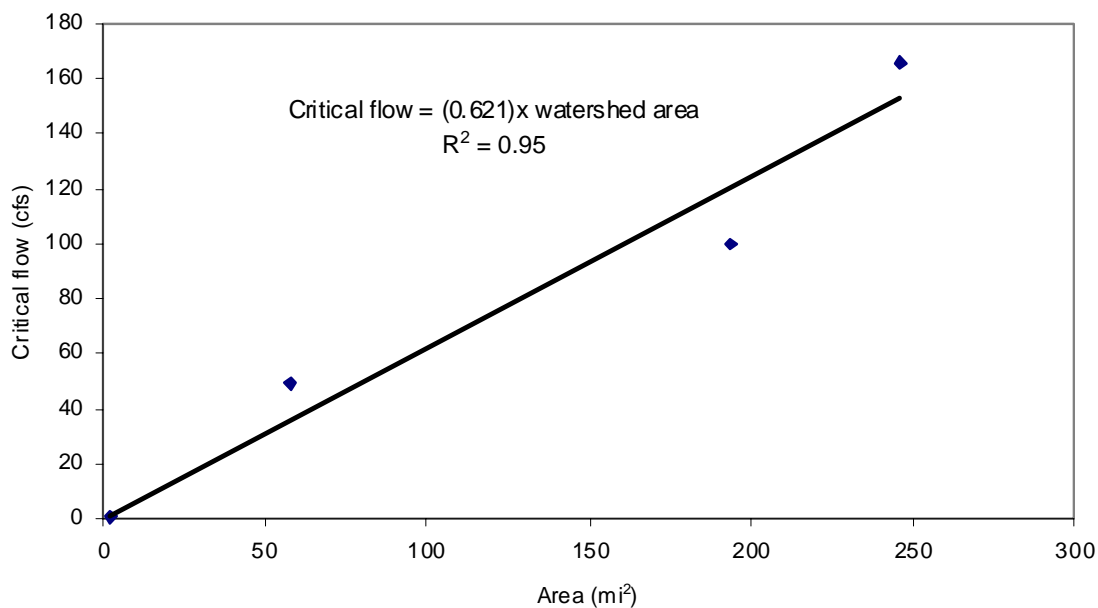


Figure 5. Relation Between Drainage Area and the Critical TMDL Flow

Application of Figure 5 for the Butchers Branch watershed yields a TMDL critical average annual discharge of 0.435 cfs at Site 8 assuming an upstream watershed area of 0.70 mi<sup>2</sup> ( $0.621 \times 0.70 = 0.435$ ). Application of a critical discharge of 0.435 cfs with the lower TMDL<sub>1</sub> curve in Figure 4 yields a TMDL for Site 8 of 0.00235 lbs/day (see Hydrogen Loading Example Calculation on page 11). Results from these calculations for all impaired subbasins are shown in Table 3. The incremental TMDL is calculated by subtracting the cumulative TMDL for all directly contributing subbasins from the cumulative TMDL for the subbasin of interest. For example, the incremental TMDL for Subbasin 6 is calculated by subtracting the cumulative TMDL for Subbasin 5 from that of Subbasin 6 ( $0.00791 - 0.00673 = 0.00118$ ).

Table 3. Flow and Corresponding TMDL for Sites (Subbasins) 8, 9, 5, and 6

Site (Sub-basin)	Cumulative Area (mi <sup>2</sup> )	Incremental Area (mi <sup>2</sup> )	Cumulative Flow (cfs)	Incremental Flow (cfs)	Cumulative TMDL (lbs/day)	Incremental TMDL (lbs/day)
8	0.70	0.70	0.435	0.435	0.00235	0.00235
9	0.38	0.38	0.236	0.236	0.00127	0.00127
5	2.01	0.52	1.248	0.323	0.00673	0.00174
6	2.36	0.35	1.466	0.217	0.00791	0.00118

## Hydrogen Ion Loading Model

There were no permitted point sources in this watershed during the 2000-2002 monitoring period that contributed to the existing pH impairment. As a result, the wasteload allocations for the Butchers Branch Watershed are assumed to be zero. Therefore, the entire hydrogen ion load can be attributed to abandoned mine land (AML) nonpoint sources.

Based on a physical inspection of the watershed, it is hypothesized that the lowering of the pH in the stream is directly related to oxidation of sulfur that occurs as runoff flows over the spoil areas associated with previous mining activities in the basin. Using the most recent monitoring data, inductive models were developed for monitoring Sites 8, 9, 5, and 6 that relate total hydrogen ion loading to flow. These models are shown in Figures 6-9 and are derived from the data in Table 1. In developing these models for defining the current load, a conservative value of 0.88 was assumed for the activity coefficient based on the upper limit of measured specific conductivity values of 1500 ( $\mu$  ohms/cm). These models will be used in conjunction with the plot of the minimum TMDL<sub>1</sub> curve as shown in Figure 4. As discussed previously, this minimum TMDL<sub>1</sub> curve was developed assuming an activity coefficient of 1.0, thus providing for an upper limit for a MOS for the TMDL of approximately 12 percent.

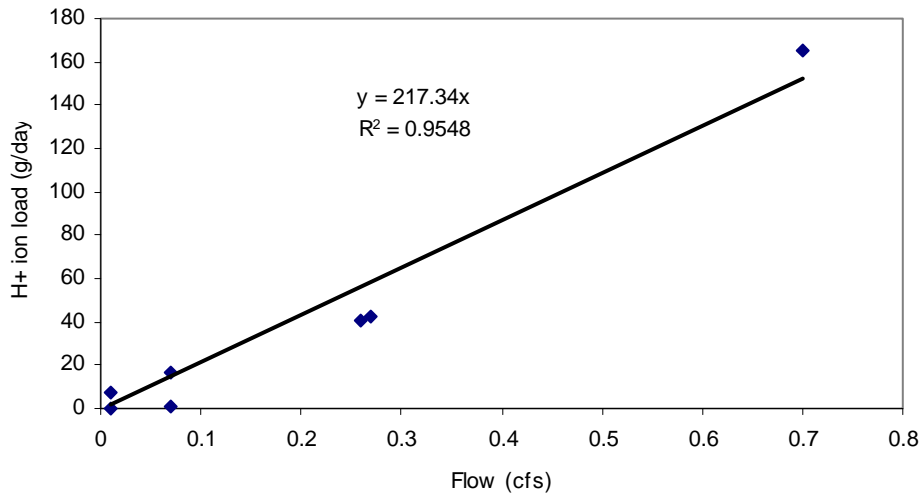


Figure 6. Relation Between Flow and Ion Load for Site 8

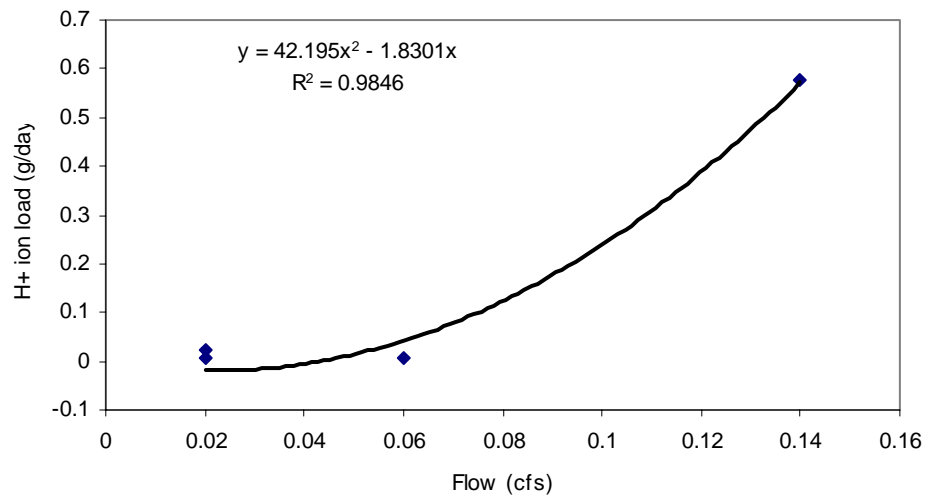


Figure 7. Relation Between Flow and Ion Load for Site 9

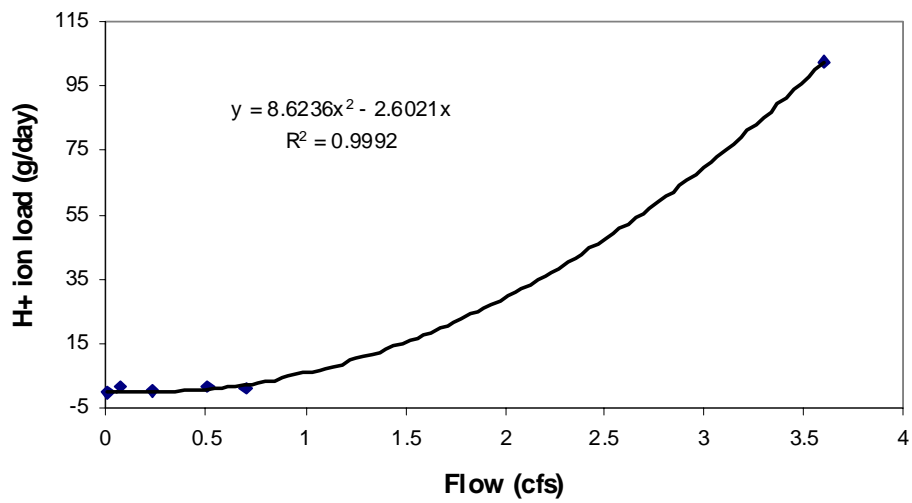


Figure 8. Relation Between Flow and Ion Load for Site 5

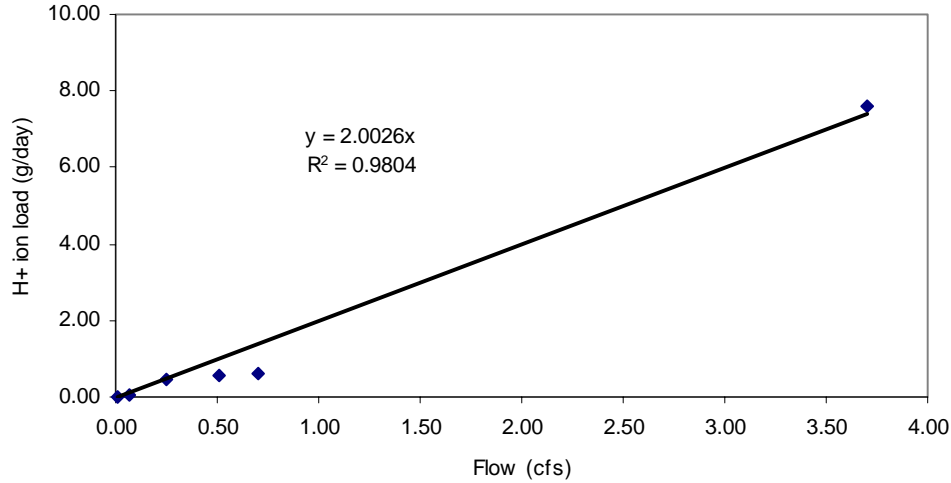


Figure 9. Relation Between Flow and Ion Load for Site 6

The best trend lines through the monitoring data (Figures 6-9) yield the estimated current hydrogen ion loading for different flow values. These trend lines are based on a regression analysis of the observed field data collected at Sites 8, 9, 5, and 6. Using the critical flow values for the four sites (subbasins), the estimated current hydrogen ion loading will be obtained for the four sites.

### Predicted Load

In the current case, cumulative and incremental TMDLs were established for the impaired subbasins (i.e. Subbasins 8, 9, 5, and 6). The incremental load reductions for these subbasins can then be obtained by subtracting the incremental TMDL from the incremental load for these subbasins. Attainment of the load reduction for Subbasins 8, 9, 5, and 6 should meet the TMDL requirement for the complete watershed.

The predicted hydrogen ion load for Subbasin 8 may be obtained using the critical discharge from Table 3 and the associated load relationship shown in Figure 6. Use of a critical flow of 0.435 cfs with the fitted line in Figure 6 yields a load of 94.54 g/day ( $217.34 \times 0.435 = 94.54$ ) or 0.2084 lbs/day. Therefore, for the purpose of developing the associated load reduction required for Subbasin 8, the observed critical load is assumed to be 0.2084 lbs/day, as shown in Table 4. The predicted hydrogen ion loads for Sites 9, 5, and 6 were computed in a similar way, and are also given in Table 4. Also note that for Subbasins 8 and 9, the incremental and cumulative predicted loads are the same due to the fact that there are no upstream subbasins. The incremental load for Subbasins 5 and 6 were calculated by subtracting the cumulative load for directly contributing subbasins from the cumulative load for Subbasin 5 and 6. For example, to calculate the incremental load for Subbasin 6 in lbs/day, the cumulative load for Subbasin 5 was subtracted from that of Subbasin 6 ( $0.0065 - 0.0225 = -0.016 = 0$ ).

Table 4. Predicted Ion Load for Subbasins 8, 9, 5, and 6

Sub-basin	Cumulative Flow (cfs)	Predicted load Cumulative (gm/day)	Predicted load Cumulative (lbs/day)	Incremental Flow (cfs)	Predicted load Incremental (gm/day)	Predicted load Incremental (lbs/day)
8	0.435	94.54	0.2084	0.435	94.54	0.2084
9	0.236	1.92	0.0042	0.236	1.92	0.0042
5	1.248	10.18	0.0225	0.323	0.00	0.0000
6	1.466	2.94	0.0065	0.217	0.00	0.0000

### Load Reduction Allocation

Once a TMDL is developed for a watershed, the needed load reductions can be determined. One way to accomplish this objective is through the use of unit load reductions as applied to different land uses within the watershed. The impacts of such reductions in meeting the WQS can then be verified through mathematical simulation. For this TMDL, the hydrogen ion load is entirely associated with AML. Also, separate TMDLs and associated load reductions can be developed for individual subbasins within the watershed. In the current study, separate TMDLs and associated load reductions were developed for Subbasins 8, 9, 5, and 6 as identified in Figure 2.

Translation of the incremental TMDL in Table 3 into associated daily load reduction for Subbasins 8, 9, 5, and 6 may be accomplished by subtracting the incremental TMDLs from the predicted incremental loads for Subbasins 8, 9, 5, and 6 (Table 4). For Subbasin 8, the calculation is  $0.2084 - 0.00235 = 0.2061$ . This approach allocates the total load reduction for Butchers Branch (defined at Site 6) between each of the contributing subbasins in the watershed, so that the entire watershed is rehabilitated and the pH is improved throughout the stream network. Application of this approach yields the values in Table 5.

Table 5. TMDL Summary and Reduction Needed for Subbasins 8, 9, 5, and 6

Subbasin	Upstream contributing area (mi <sup>2</sup> )	Incremental critical flow (cfs)	Incremental TMDL for a pH of 6.0 (lbs/day)	Predicted incremental load (lbs/day)	Load reduction needed (lbs/day)
8	0.70	0.435	0.00235	0.2084	0.2061
9	0.38	0.236	0.00127	0.0042	0.0029
5	2.01	0.323	0.00174	0.0000	0.0000
6	2.36	0.217	0.00118	0.0000	0.0000

## Permitting

### *Permitting in subbasins other than 8, 9, 6, and 5 (which includes Subbasins 2 and 4)*

Permitting for locations in the Butchers Branch Watershed in subbasins other than 8, 9, 6, and 5 (which includes Subbasins 2 and 4) would require no special considerations related to 303(d). There were no violations of the pH standard at Site 7. Therefore, the impaired segment extends only from the headwaters to Site 6. There were also no violations of the pH criteria in Subbasins 2 and 4, but flow from these subbasins enters the impaired segment of Butchers Branch.

### *New Permits*

New permits (except for new remining permits) for discharges to streams in the Butchers Branch could be allowed in Subbasins 8, 9, 6, and 5 (which includes Subbasins 2 and 4) contingent upon end-of-pipe pH limits in the range of 6.35 to 9.0 standard units. WQSs state that the pH value should not be less than 6.0 nor greater than 9.0 for meeting the designated uses of aquatic life and swimming. This range of 6.0 to 9.0 for pH is generally assigned as end-of-pipe effluent limits. However, because a stream impairment exists (low pH), new discharges should not cause or contribute to an existing impairment. Application of agricultural limestone on mine sites results in highly buffered water leaving the site. A buffered solution with nearly equal bicarbonate and carbonic acid components will have a pH of 6.35 (Carew, personal communication, 2004). Discharge of this buffered solution will use up free hydrogen ions in the receiving stream, thus it should not cause or contribute to an existing low-pH impairment. New permits having an effluent limit pH of 6.35 to 9.0 will not be assigned a hydrogen ion load as part of a WLA.

### *Remining Permits*

Remining permits may be approved on a case-by-case basis where streams are impaired because of low pH from abandoned mines. Existing water quality conditions must be maintained or improved during the course of mining. Permit approval is contingent on reclamation of the site after mining activities are completed. Reclamation of the site is the ultimate goal, but WQSs (pH of 6.0 to 9.0 standard units) may not necessarily be met in the interim if the Commonwealth issues a variance to the permittee. In instances where the Commonwealth issues a variance for a remining activity consistent with this regulation, hydrogen ion loads from this remining activity are allowed to exceed the WLA. The variance allows an exception to the applicable WQS as well as to the TMDL. Remining therefore constitutes a means whereby a previously disturbed and unreclaimed area can be reclaimed. The authority for remining is defined in Section 301(p) of the Federal Clean Water Act; Chapter 33, Section 1331(p) of the U.S. Code – Annotated (the Rahall Amendment to the Federal Clean Water Act); and the Kentucky Administrative Regulations (401 KAR 5:040 and 5:029).

The eventual reclamation of the remining site should result in a reduction of the nonpoint source ion load of the subbasin where the remining was done. The reclamation should also result in an improved stream condition (increased pH) because a previously disturbed and unreclaimed area will be reclaimed. Follow-up, in-stream monitoring would need to be done at the subbasin outfall to determine the effect of reclamation activities (following remining) on the overall ion load coming from the subbasin.

#### *General KPDES Permit for Coal Mine Discharges*

This permit covers all new and existing discharges associated with coal mine runoff. This permit does not authorize discharges that (1) are subject to an existing individual KPDES permit or application, (2) are subject to a promulgated storm water effluent guidelines or standard, (3) the Director has determined to be or may reasonably be expected to be contributed to a violation of a water of a WQS or to the impairment of a 303(d) listed water, or (4) are into a surface water that has been classified as an Exceptional or Outstanding or National Resource Water. A signed copy of a Notice of Intent (NOI) form must be submitted to the Kentucky Division of Water (KPDES Branch) when the initial application is filed with the Division of Mine Permits. However, coverage under this general permit may be denied and submittal of an application for an individual KPDES permit may be required based on a review of the NOI and/or other information.

#### *Antidegradation Policy*

Kentucky's Antidegradation Policy was approved by EPA on April 12, 2005. For impaired waters, general permit coverage will not be allowed for one or more of the pollutants commonly associated with coal mining (i.e., sedimentation, solids, pH, metals, alkalinity of acidity). The individual permit process remains the same except new conditions may apply if a Total Maximum Daily Load (TMDL) has been developed and approved.

#### *Distribution of Load*

Because there were no point source discharges in the watershed that contributed to the existing low pH impairment during the monitoring period, the entire load was defined as nonpoint source load. Because new permits (pH 6.35 to 9.0) and remining permits would be exempt from the TMDL requirements, no load has been provided for the WLA category (Table 6).



Table 6. Wasteload and Load Allocation for Subbasins 8, 9, 5, and 6

Subbasin	Incremental Critical Flow Rate (cfs)	TMDL for pH = 6.0 (lbs/day)	Wasteload Allocation* (lbs/day)	Load Allocation (lbs/day)
8	0.435	0.00235	0.0	0.00235
9	0.236	0.00127	0.0	0.00127
5	0.323	0.00174	0.0	0.00174
6	0.217	0.00118	0.0	0.00118

\*pH limits for new discharges must be between 6.35 and 9.0

### Implementation/Remediation Strategy

Remediation of pH-impaired streams as a result of current mining operations is the responsibility of the mine operator. The Kentucky Division of Field Services of the Kentucky Department of Surface Mining Reclamation and Enforcement (DSMRE) is responsible for enforcing the Surface Mining Control and Reclamation Act of 1977 (SMCRA). The Kentucky DAML, also a part of DSMRE, is charged with performing reclamation to address the impacts from pre-law and bond forfeiture mine sites in accordance with priorities established in SMCRA. SMCRA sets environmental problems as third in priority in the list of AML problem types.

Prior to initiating reclamation activities to improve water quality, a watershed plan should be developed in order to more precisely identify past mine site operations in the watershed. For example, the watershed plan should include a detailed overview of past mine operations, including the location of the mine, the permit number, the type of mining and the status of the mine (e.g. active, bond forfeited, bond released, illegal “wildcat” mining, etc.). Refining historic landuses in the watershed, with a particular focus on mine site operations, will assist with identifying the most appropriate funding source(s) as well as the best management practices needed for remediating the pH impacts.

In addition to historic mine operation inventory, the watershed plan should identify (1) point and nonpoint source controls needed to attain and maintain WQS, (2) who will be responsible for implementation of controls and measures, (3) an estimate of the load reductions to be achieved, (4) threats to other waters, (5) an estimate of the implementation costs and identify financing sources, (6) a monitoring plan and adaptive implementation process and (7) a public participation process. The watershed plan should consider non-traditional opportunities and strive for the most cost-effective long-term solutions for restoring the water quality of Butchers Branch.

Practical application of pH TMDLs, especially for AMLs, will normally involve a phased implementation approach with associated monitoring in order to insure that the implemented measures are having the desired effect. Typical remediation strategies have involved channel restoration, re-vegetation, and the use of agricultural limestone. On

sites where applicable, and funding allows, passive treatment systems have been used to treat AMD including open limestone channels, vertical flow systems, limestone dosing, and constructed wetlands.

There are currently no remediation activities underway in the Butchers Branch watershed. However, reclamation activities have occurred at other locations within the state where AMD affects water quality. Examples of reclamation projects addressing AMD in western KY are summarized in Table 7.


Table 7. Reclamation Projects Addressing AMD in Western Kentucky

<b>Watershed</b>	<b>Project Name</b>	<b>Cost</b>
Brier Creek	Brier Creek	\$522,041
	Buttermilk Road	\$403,320
Crab Orchard Creek	Crab Orchard Mine	\$1,038,203
	Zugg Borehole	\$11,974
Pleasant Run	Pleasant Run	\$2,162,085
	Pleasant Run II	\$421,384
Pond Creek	Pond Creek I	\$50,118
	Pond Creek II	\$3,801,740
	Pond Creek III	\$4,011,514
Flat Creek	East Diamond Mine	\$535,000
	Flat Creek	\$720,572
Render Creek	McHenry Coop. Agreement	\$130,165
	McHenry II	\$1,075,340
	Vulcan Mine	\$585,359

For 2000, the total federal DAML budget allocation was approximately \$17 million. However, the bulk of these funds were used to support Priority 1 (extreme danger of adverse effects to public health, safety, welfare, and property) and Priority 2 (adverse effects to public health, safety, and welfare) projects. Of the total annual federal budget allocation, AML receives only approximately \$700,000 in Appalachian Clean Streams Initiative funds, which are targeted for Priority 3 environmental problems. Based on the cost of current remediation efforts, it would appear that a significant increase in federal funding to the DAML projects, particularly Priority 3 projects, would be required in order for the AML program to play a significant part in meeting the TMDL implementation requirement associated with pH-impaired streams in the state of Kentucky.

## Load Reduction Strategy Using Limestone Sand

Recent studies in West Virginia (Clayton, et. al., 1998) and Kentucky (Carew, 1998) have demonstrated that limestone sand can be used as an effective agent for restoring the pH in acidified streams. For streams with a pH < 6, CaCO<sub>3</sub> may be used to neutralize free hydrogen ions based on the following relationship:



Thus, the theoretical total mass of CaCO<sub>3</sub> required to neutralize 1 gm of H<sup>+</sup> ions can be obtained by dividing the molecular weight of CaCO<sub>3</sub> (100) by the molecular weight of 2 hydrogen atoms (2) to yield:

$$\text{Required mass of limestone} = 50 * \text{Mass of Hydrogen Ions} \quad (12)$$

Or, in terms of a required annual load:

$$\text{Annual required mass of limestone} = 18,250 * \text{Mass of Hydrogen Ions (g/day)} \quad (13)$$

In practice, however, this value will only represent a lower bound of the required mass as a result of two issues: 1) not all the limestone added to a stream will be readily available as soluble CaCO<sub>3</sub>; and 2) an increasing fraction of the CaCO<sub>3</sub> mass will be required to neutralize other metal ions (e.g. Fe, Al, Mn) that will also most likely be present in the acid mine drainage, especially in the case of streams with pH < 4.5 (Snoeyink and Jenkins, 1980).

One way to deal with the first limitation is to simply add more limestone to the stream. Recent studies in both West Virginia and Kentucky have found that application rates of 2 to 4 times the theoretical limestone requirement have been found to be effective in restoring AMD streams. The most effective way to deal with the second limitation is to determine the additional amount of limestone that must be added to neutralize both the hydrogen ions and the additional ions that might be present. One way to approximate this quantity is by calculating the total acidity in the water column (as expressed directly as CaCO<sub>3</sub>).

Total acidity is normally defined as a measure of the concentration of acids (both weak and strong) that react with a strong base. Acidity may be determined analytically by titrating a water sample with a standard solution of a strong base (e.g. NaOH) to an electrometrically observed end point pH of 8.3. (For waters associated with acid mine drainage it is important that any ferric salts present must first be oxidized prior to the determination of the total acidity). The required mass of NaOH required to raise the sample pH to 8.3 can then be expressed directly in terms of CaCO<sub>3</sub> as follows:

$$\text{Acidity, as mg CaCO}_3 = \frac{50,000 * (\text{mL of NaOH}) * (\text{Normality of NaOH})}{\text{Weight of sample used (mg)}} \quad (14)$$

In general, a relationship between pH (or the associated mass of free hydrogen ions), and the total acidity can be readily developed for a given stream using measured values of pH and acidity (Clayton, et. al, 1998). Using measured streamflow data, an additional relationship between the required hydrogen ion reduction (required to raise the pH up to 8.3) and the corresponding load of CaCO<sub>3</sub> (required to neutralize both the hydrogen ions and other free ions) can also be determined (Figure 10). In this particular case, Figure 10 was constructed from an analysis of data from five separate watersheds in the western Kentucky Coal Fields, and thus provides a regional curve for application to similar watersheds in the area. A similar curve could be developed for application to watersheds in other areas using regional data for that area. Alternatively, a site-specific curve could be developed for an individual watershed using measured values of flow, pH, specific conductivity, and total acidity.

For the case of Butchers Branch, site-specific stream acidity data were not collected as part of the overall sampling effort. As a result, the required CaCO<sub>3</sub> loading was determined using the regional curve. It should be recognized that the loading values produced by application of Figure 10 should theoretically increase the pH to 8.3 (based on the definition of total acidity), although pragmatically the achieved value will likely be less. As a result, Figure 10 is likely to provide a conservative estimate of the initial required CaCO<sub>3</sub> loading for a particular stream. Subsequent applications of additional limestone can be further refined through follow-up monitoring.

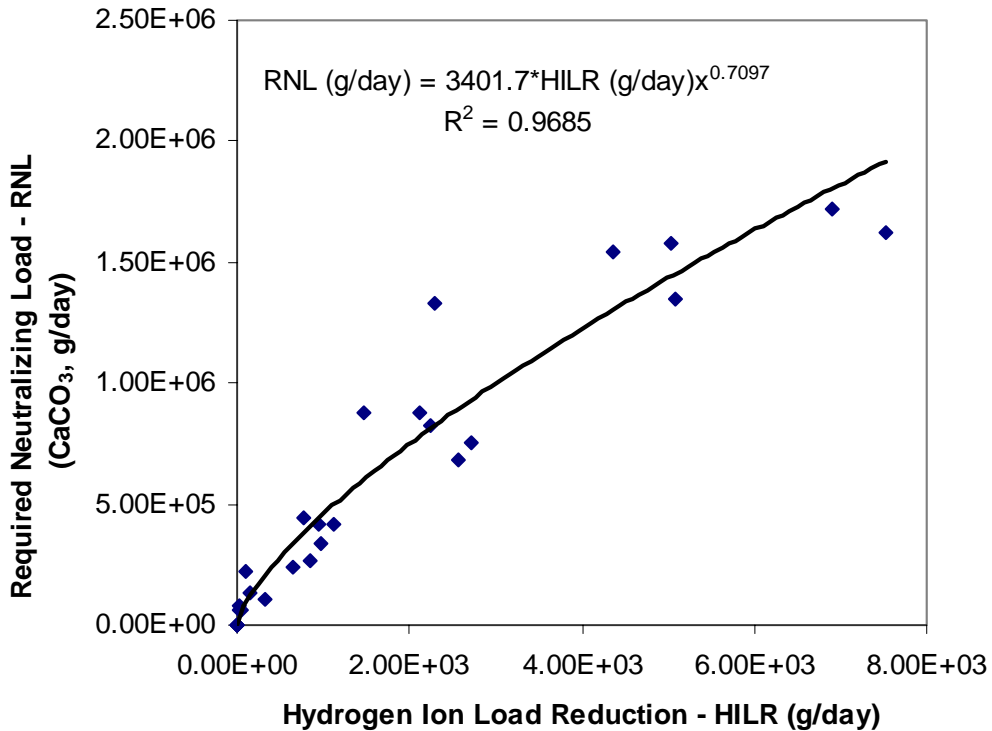


Figure 10. CaCO<sub>3</sub> Loading vs. Required Hydrogen Ion Reduction

Application of Figure 10 using the required hydrogen ion load reduction values shown in Table 5 yields the corresponding values of CaCO<sub>3</sub> loadings shown in Table 8 (for Subbasin 8, the calculation is: (3401.7) x (93.49)<sup>0.7097</sup> = 85,182. A corresponding approximation of the annual loading required can be obtained by simply multiplying the daily values by 365. Based on the work of Clayton et. al., (1998), it is recommended that the values in Table 8 be multiplied by a factor of 2 in order to provide a conservative estimate of the initial loading. Loading values for subsequent years can be modified by an analysis of pH values obtained from subsequent field monitoring.

Table 8. CaCO<sub>3</sub> Loadings for Butchers Branch

Subbasin	Required Reduction (lbs/day)	Required Reduction (g/day)	CaCO <sub>3</sub> Loading (g/day)	CaCO <sub>3</sub> Loading (lbs/day)	CaCO <sub>3</sub> Loading (tons/yr)
Subbasin 8	0.2061	93.49	85,182	187.79	34
Subbasin 9	0.0029	1.32	4,143	9.13	2
Subbasin 5	0.0000	0.00	0	0.00	0
Subbasin 6	0.0000	0.00	0	0.00	0

### Public Participation

This TMDL was placed on 30-day public notice and made available for review and comment from Nov. 17 through Dec. 17, 2005. The public notice was prepared and published as an advertisement in The Hancock Clarion, a newspaper with wide circulation in Hancock County. A press release was also distributed to newspapers statewide. In addition, the press release was submitted to approximately 275 persons via a Kentucky Nonpoint Source electronic mailing distribution list.

The TMDL was made available on KDOWs website at [www.water.ky.gov/sw/tmdl](http://www.water.ky.gov/sw/tmdl), and hard copies could be requested by contacting the KDOW. The public was given the opportunity to review the TMDL and submit comments to KDOW in writing prior to the close of the public comment period. At the end of the public comment period, all written comments received became part of KDOWs administrative record. KDOW considered all comments received by the public prior to finalization of this TMDL and subsequent submission to EPA Region 4 for final review and approval.

## LITERATURE CITED

- Carew, M. (1998) *Rock Creek Reclamation Project, Kentucky Department for Surface Mining Reclamation and Enforcement*, Kentucky Division of Abandoned Mine Lands, 12 pp.
- Carew, M. (2004) Personal Communication dated 11/8/2004.
- Clayton, J.L., Dannaway, E.S., Menendez, R., Rauch, H.W., Renton, J.J., Sherlock, S.M. and Zurbuch, P.E. (1998). "Application of limestone to restore fish communities in acidified streams". *North American Journal of Fisheries Management*, 18: 347-360.
- EPA, (1981) *Clean Water Act*, Section 303(d), 40 CFR Part 130, 1991b.
- EPA, (1991) *Technical Support Document for Water Quality-based Toxics Control*, EPA 505/2-90-001, March 1991.
- Grubb, H. and Ryder, P., (1972) *Effects of Coal Mining on the Water Resources of the Tradewater River Basin, Kentucky*, Geological Survey Water Supply Paper 1940, pp. 66-79.
- Kentucky Administrative Regulations, (2002) Title 401, Chapters 5:029, 5:031, and 5:040
- Kentucky Division of Water, (1981) *The Effects of Coal Mining Activities on the Water Quality of Streams in the Western and Eastern Coalfields of Kentucky*, Kentucky Department for Environmental Protection, Frankfort, KY
- Kentucky Division of Water, (1996) 1996 *303(d) List of Waters for Kentucky*, Kentucky Department for Environmental Protection, Frankfort, KY
- Kentucky Division of Water, (1998) 1998 *303(d) List of Waters for Kentucky*, Department for Environmental Protection, Kentucky Natural Resources and Environmental Protection Cabinet.
- Kentucky Division of Water, (2003) 2002 *303(d) List of Waters for Kentucky*, Kentucky Department for Environmental Protection, Frankfort, KY.
- Snoeyink, V.L., and Jenkins, D., (1980) *Water Chemistry*, Wiley, Inc, New York, NY, 1980, pp. 77-78.
- US Department of Agriculture, Soil Survey of Daviess and Hancock Counties, Kentucky, 1974
- US Geological Survey, (1983) Hydrology of Area 34, Eastern Region, Interior Coal Province, Kentucky, Indiana, and Illinois, Water Resources Investigations Open File Rep. 82-638, Louisville, KY, 42-43

## APPENDIX A: MINING PERMITS NUMBERING SYSTEM

XXXX-XX Permit issued prior to May 3, 1978. Ex. 1357-76. The first four numbers represent the mine number. The last two numbers represent the year of issuance.

XXX-XXXX Permit issues after May 3, 1978. The first three numbers indicate the location of the mine by county and the timing of the original permit issuance. (Ex. Hopkins County = 54).

If the first three numbers correspond to the county number, the permit was originally issued during the interim program.

If 200 has been added to the county number, the permit was originally issued prior to May 3, 1978, and carried through into the interim program. Ex. 254 (Hopkins)

If 400 has been added to the county number the permit was issued prior to the Permanent Program and was to remain active after January 18, 1983. Ex. 454 or 654 (Hopkins)

If 800 has been added to the county number: (1) the application is for a permit after January 18, 1983 or (2) two or more previously permitted areas have been combined into a single permit. Ex. 854 (Hopkins)

The last four numbers indicate the type of mining activity being permitted.

### COAL

0000-4999	Surface Mining
5000-5999	Underground Mine
6000-6999	Crush/Load Facility
7000-7999	Haul Road Only
8000-8999	Preparation Plant
9000-9399	Refuse Disposal

### NON-COAL

9400-9499	Limestone
9500-9599	Clay
9600-9699	Sand/Gravel
9700-9799	Oil Shale
9800-9899	Flourspar